

# PVC STEEL WIRE HOSE



**THUNDER HOSE - FOOD GRADE - PHTHALATE FREE**



## Structure:

Suction and transport hose, inside outside smooth, tough and flexible, vacuum and compression resistance and with high axial strength

## Material

Non toxic / Food Grade  
Phthalate Free

## Applications:


Vacuum lines of auto loaders (Plastic Processing, Dust collector), transport of Resin and Granules in plastic industry, conveying of low temperature food grade material and fluid in food processing and pharmaceutical industry, draining sewage and water. Used as oil drains for machineries.

## Temperature range:

70°C

## Colour:

Transparent

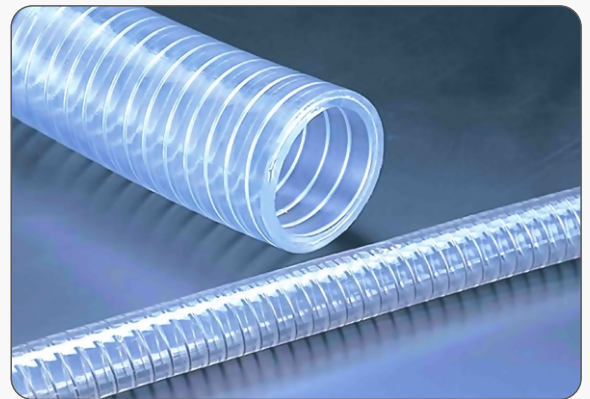

Mob: +91-9843810577 | Phone : 0422 - 23 93 253 | 0422 - 23 93 453

Email : flexaflexhosesce@gmail.com | pipe.agencies@gmail.com

www.flexaflexhoses.in | www.pipeagencies.in +91-94 897 38 415






**FLEXAFLEX HOSES INDUSTRIES**  
51, Dr. NANJAPPA ROAD  
COIMBATORE - 641 018

# PVC STEEL WIRE HOSE



**THUNDER HOSE - FOOD GRADE - PHTHALATE FREE**

## PVC Steel wire Hose

				
int mm	out mm	mm	bar	mbar
10	16	64	7.0	850
12	18	72	6.0	850
13	19	76	6.0	850
14	20	80	6.0	850
16	22	90	5.0	850
18	24	98	5.0	850
19	25	100	5.0	850
20	26	104	5.0	850
22	28	112	5.0	850
25	32	128	4.0	850
30	38	152	4.0	850
32	41	164	4.0	850
35	44	176	4.0	850
38	47	188	4.0	850
40	50	200	4.0	850
42	52	208	4.0	800
45	55	220	4.0	800
48	58	232	4.0	800
50	60	256	4.0	800
60	72	288	3.6	800
63	75	300	3.6	800
65	77	308	3.6	700
70	83	332	3.6	700
75	89	356	3.6	700
76	90	360	3.6	700
80	94	372	3.6	700
90	104	416	3.0	700
102	116	464	2.4	700
127	142	470	2.4	700
152	168	490	2.4	700
203	223	510	2.4	700


Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)


## Special Products

### PVC Steel wire hose with ANT copper wire



### PVC Steel wire Hose with Fabric Reinforcement

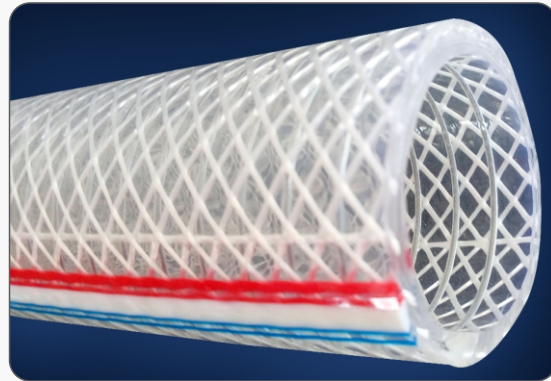

			
int mm	out mm	W.P. bar	B.P. bar
25	33	6	18
32	41	5	15
38	44	5	15
50	60	5	15
64	75	4	12
75	88	4	12
90	106	4	12
102	116	4	12

Mob: +91-9843810577 | Phone : 0422 - 23 93 253 | 0422 - 23 93 453

Email : flexaflexhosesbe@gmail.com | pipe.agencies@gmail.com

www.flexaflexhoses.in | www.pipeagencies.in +91-94 897 38 415

**FLEXAFLEX HOSES INDUSTRIES**  
51, Dr. NANJAPPA ROAD  
COIMBATORE - 641 018